

# TREE BUBBLERS

## Pressure Compensating Tree Bubblers

Application: Non-turf Areas


## Models

TB-05	0.5 GPM (1,9 LPM) Bubbler
TB-10	1.0 GPM (3,8 LPM) Bubbler
TB-20	2.0 GPM (7,6 LPM) Bubbler
TB-ADJ	Adjustable Bubbler

## Specifications

- Flow Rate:
  - TB-05: 0.5 GPM (0,114 m<sup>3</sup>/h; 1,9 l/m)
  - TB-10: 1.0 GPM (0,227 m<sup>3</sup>/h; 3,8 l/m)
  - TB-20: 2.0 GPM (0,454 m<sup>3</sup>/h; 7,6 l/m)
  - TB-ADJ: 1.36 – 5.9 GPM (0,31 – 1,34 m<sup>3</sup>/h; 5 – 22 l/m)
- Operating Pressure: 20 – 50 PSI (1,4 – 2,8 bar)
- Spacing: 1' – 3' (0,3 m – 0,9 m)
- Inlet: 1/2" (1,3 cm) Female Thread
- Umbrella Pattern

K-Rain's pressure compensating bubblers are ideal for tree and large shrub watering. Pressure compensation ensures consistent flow rates over lower pressure ranges.

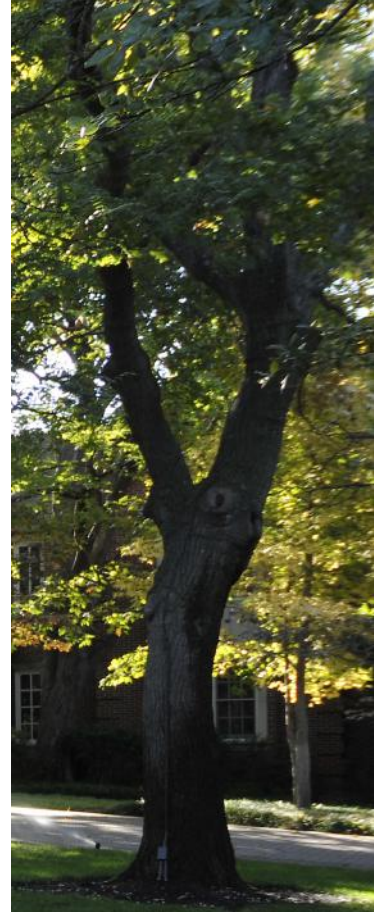

The K-Rain Dripline System provides irrigation efficiency and trouble-free operation.