
K-SPRAYS



Features and Benefits

- Available in 3", 4", 6" and 12" (7,6, 10, 15, 30,5 cm)
 Models Provides flexibility in system design.
- Accepts Male Threaded Nozzles.
- Stainless Steel Retraction Spring Provides reliable retraction of the riser in all soil conditions.
- Ratcheting Riser Allows for easy pattern alignment by turning the riser.
- Heavy Duty Wiper Seal Ensures leak free, full pop-up operation even under low-pressure situations.
- Optional Water-Saving Check Valve Eliminates low head drainage.
- Optional Purple Cap for Reclaimed Water Use Highly visible for identification of RCW systems.

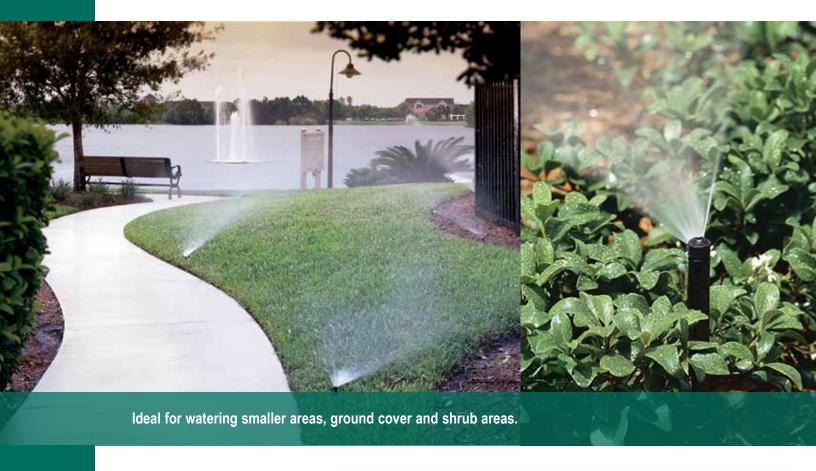

K-Rain Manufacturing Corp.

1640 Australian Avenue Riviera Beach, FL 33404 USA 561 844-1002

FAX: 561 842-9493

1.800.735.7246 | www.krain.com



The K-Spray[™] line offers system versatility with a wide range of pop-up heights suited for many applications

From small flower beds to residential and light commercial lawns and planted areas, the K-Spray™ line has the pop-up height for the job. Manufactured with time-tested UV-resistant resin and corrosion-resistant stainless steel parts for long product life and reliability.



The optional purple cap for RCW (reclaimed water use) is highly visible, making identification of reclaimed water systems easy and thus reducing liability.

Specifications

- Pressure Rating: 20 70 PSI (1,4 4,8 bar)
- Inlet: 1/2" (1,3 cm) NPT Female Thread
- Spray Body Height:

73001 – 4 3/4" (12,1 cm)

74001 – 5 7/8" (14,9 cm)

76001 - 8" (20,3 cm)

71201 - 15 3/4" (40 cm)

Models

73001 3" (7,6 cm) Pop-Up 74001 4" (10 cm) Pop-Up 76001 6" (15 cm) Pop-Up 71201 12" (30,5 cm) Pop-Up

Other Options: Add to Part Number

-RCW Reclaimed Water Use/Purple Cap

-CV Check Valve

How to Specify:

Model Number Description 73001 -RCW



Spray Head Check Valves part # P53426 (optional)



Shrub Adapter part # PSA



K-Spray bodies accept male thread nozzles such as K-Rain's KV Adjustable Nozzles. The KV Adjustable Nozzles have superior spray patterns and matched precipitation rates throughout the adjustment. They are available in 8', 10', 12', 15' and 17' models.